


# REFRIGERATOR ACCESSORIES

# PRODUCT

# CATALOG

冰箱配件产品目录



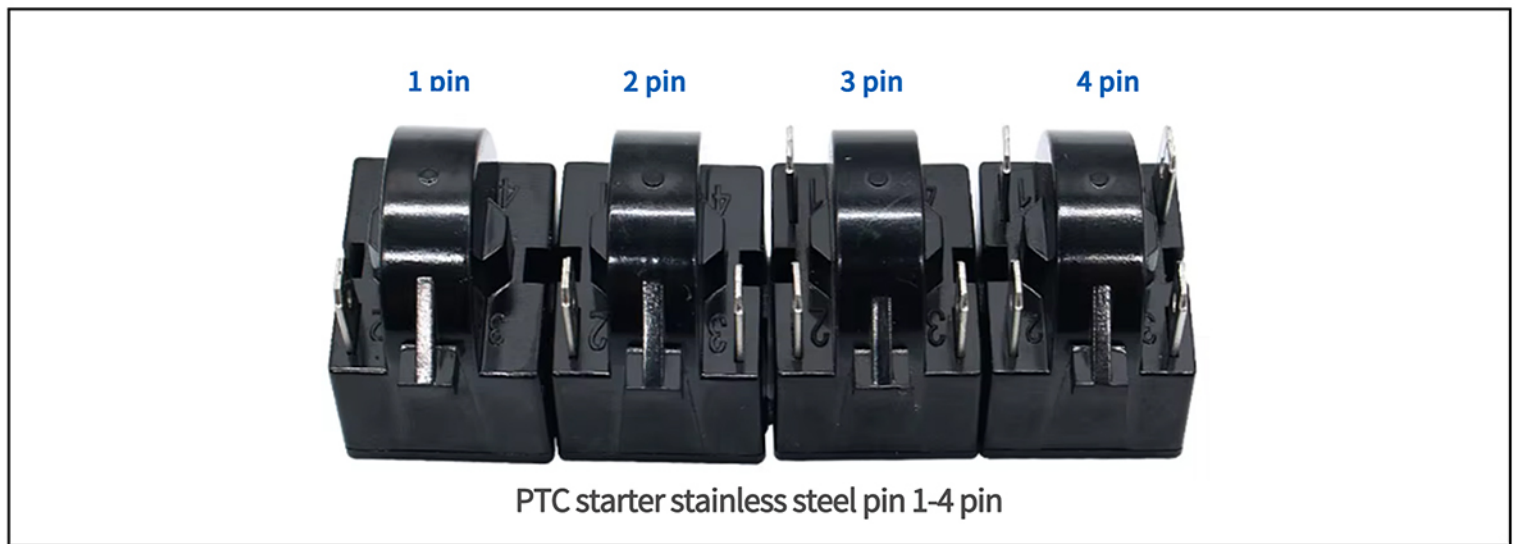

## Parameter (参数)

|         |                                   |
|---------|-----------------------------------|
| Voltage | 110V/220V                         |
| HP      | 1/2、1/3、1/4、1/5、1/6、1/7、1/8       |
| Power   | 375W、245W、180W、150W、125W、105W、93W |

| Normal Temperature Values<br>( $\Omega \pm 30\%$ ) | Maximum Voltage<br>(V) | Maximum Current<br>(A) | Power Consumption<br>(W) | Operation Time<br>(s) | Recovery Time<br>(s) |
|----------------------------------------------------|------------------------|------------------------|--------------------------|-----------------------|----------------------|
| 12                                                 | 450                    | 10                     | <3                       | 0.14~0.56             | $\leq 90$            |
| 15                                                 |                        | 9                      |                          |                       |                      |
| 22                                                 |                        | 8                      |                          |                       |                      |
| 33                                                 |                        | 7                      |                          |                       |                      |
| 47                                                 |                        | 6                      |                          |                       |                      |
| 100                                                |                        | 3.5                    | <2                       | 1.2~2.8               |                      |

# ▶ PTC-7/11 SERIES (PTC-7/11系列)

1 pin



2 pin



3 pin



4 pin



PTC-7starter stainless steel pin 1-4 pin

1 pin



2 pin



3 pin



4 pin



PTC-11starter stainless steel pin 1-4 pin

## Parameter (参数)

|         |                                   |
|---------|-----------------------------------|
| Voltage | 110V/220V                         |
| HP      | 1/2、1/3、1/4、1/5、1/6、1/7、1/8       |
| Power   | 375W、245W、180W、150W、125W、105W、93W |

| Normal Temperature Values<br>( $\Omega \pm 30\%$ ) | Maximum Voltage<br>(V) | Maximum Current<br>(A) | Power Consumption<br>(W) | Operation Time<br>(s) | Recovery Time<br>(s) |
|----------------------------------------------------|------------------------|------------------------|--------------------------|-----------------------|----------------------|
| 12                                                 | 450                    | 10                     | <3                       | 0.14~0.56             | $\leq 90$            |
| 15                                                 |                        | 9                      |                          |                       |                      |
| 22                                                 |                        | 8                      |                          |                       |                      |
| 33                                                 |                        | 7                      |                          |                       |                      |
| 47                                                 |                        | 6                      |                          |                       |                      |
| 100                                                |                        | 3.5                    | <2                       | 1.2~2.8               |                      |

# ► IC / ZANUSSI-8 SERIES (IC / Zanussi-8系列)

1 pin



2 pin



3 pin



4 pin



IC 1-4 PTC starter

No pin



1 pin



2 pin



3 pin



Zanussi-8 no pin or 1-3 pin

## Parameter (参数)

|         |                                   |
|---------|-----------------------------------|
| Voltage | 110V/220V                         |
| HP      | 1/2、1/3、1/4、1/5、1/6、1/7、1/8       |
| Power   | 375W、245W、180W、150W、125W、105W、93W |

| Normal Temperature Values<br>( $\Omega \pm 30\%$ ) | Maximum Voltage<br>(V) | Maximum Current<br>(A) | Power Consumption<br>(W) | Operation Time<br>(s) | Recovery Time<br>(s) |
|----------------------------------------------------|------------------------|------------------------|--------------------------|-----------------------|----------------------|
| 12                                                 | 450                    | 10                     | <3                       | 0.14~0.56             | $\leq 90$            |
| 15                                                 |                        | 9                      |                          |                       |                      |
| 22                                                 |                        | 8                      |                          |                       |                      |
| 33                                                 |                        | 7                      |                          |                       |                      |
| 47                                                 |                        | 6                      |                          |                       |                      |
| 100                                                |                        | 3.5                    | <2                       | 1.2~2.8               |                      |