

TEMPERATURE CONTROLLER PRODUCT CATALOG

温度控制器产品目录





Model	Size	Specifications
LT102	48*48MM	LED Digital Intelligent Pid Temperature Controller Input type:TC/RTD (K,J,E,T,S,PT100,Cu100,Cu50,It can switch in menu) Analog signals:0-5V,0-10V,1-5V,4-20mA (customizable) Input: 4-20mA Output: Relay/SSR/0-10V/4-20mA, Alarm : 1 / 2 RS485 :YES/NO
LT412	48*96MM	
LT512	96*48MM	
LT712	72*72MM	
LT912	96*96MM	





Model	Size	Specifications
LC108	48*48MM	LCD Digital Intelligent Pid Temperature Controller Input typeTC,RTD (K,J,E,T,S,PT100,Cu100,Cu50,It can switch in menu) Analog signals:0-5V,0-10V,1-5V,4-20mA (customizable) Output type:SSR/Rlay/0-10v/4-20mA (0-5V customizable) Alarm : 1 or 2 RS485 :YES/NO
LC408	48*96MM	
LC708	72*72MM	
LC908	96*96MM	



Model	Size	Specifications
PMA100	48*48MM	MAX 50 segments programmable LCD display, high brightness backlight screen, wide viewing angle. Input type: TC/RTD (K, J, E, T, S, PT100, Cu100, Cu50, It can switch in menu) Analog signals: 0-5V, 0-10V, 1-5V, 4-20mA (customizable) Output type: SSR/Relay/ 0-10V /4-20mA Alarm : 1 / 2 RS485 : YES/NO
PMA400	48*96MM	
PMA700	72*72MM	
PMA900	96*96MM	

The name of the series	Code name	Panel size	Code name	Main control output	Code name	Group 2 output	Code name	Alarm output	Code name	Transfer the output	Code name	Remote control input	Code name	communication	Code name	The input signal	Code name	The main power supply	Code name
Constant value control	MA	DIN48x48	100	no output	0	no output	0	No alarm	0	No transfer	0	nothing	0	nothing	0	thermocouple	1	85~265V	A
Program control	PMA	DIN72x72	700	Relay contact output	1	Relay contact output	1	A set of alarm	1	PV value transfer	1			24V auxiliary power supply	1	Platinum resistance	2		
		DIN48x96	400	SSR trigger signal	2	SSR trigger signal	2	Two groups of alarm	2	SV value transfer	2			TTL main control	3	Linear signal	3		
		DIN96x96	900	4~20mA current output	3	4~20mA	3							RS485 MODBUS	B				
				0~10V voltage output	4	0~10V	4												
				Single phase SCR zero trigger	5														
				Three phase SCR zero trigger	6														
				No proportional feedback motor	7														
				Single phase zero trigger	8														
				Three phase zero trigger	9														

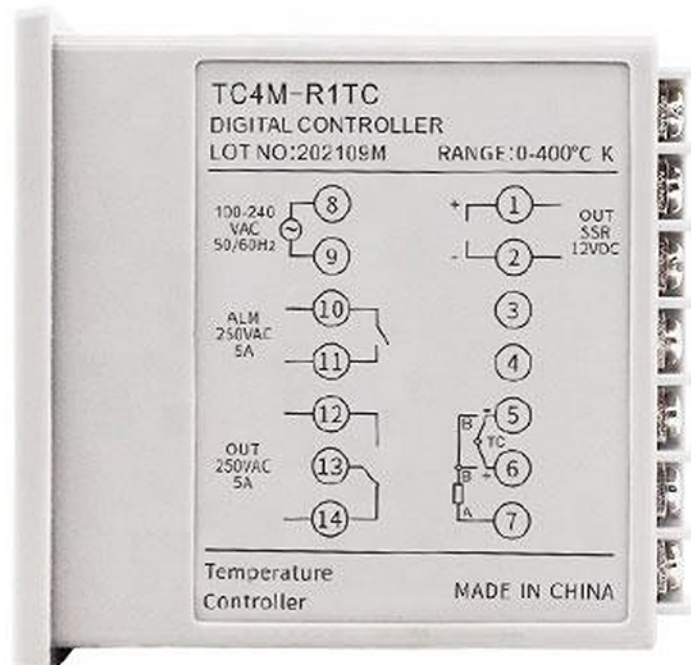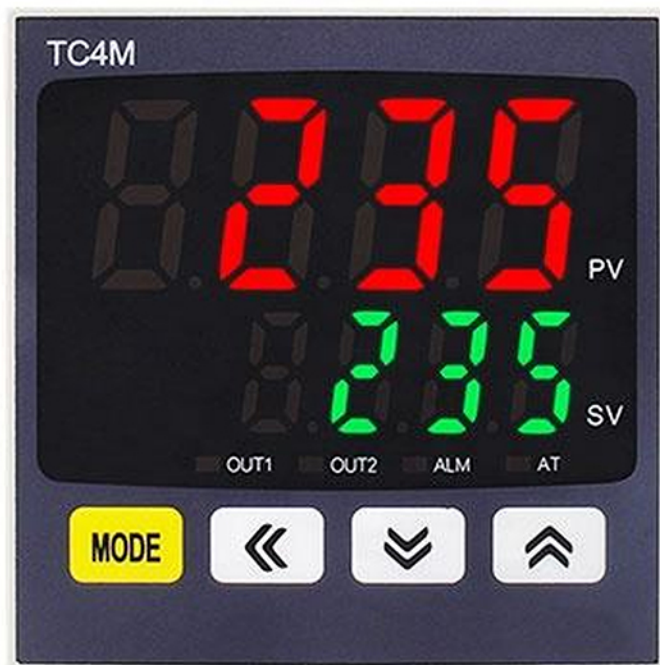

Model	Size	Specifications
TC4S	48*48MM	Input type:TC/RTD (K,J,E,T,S,PT100,Cu100,Cu50,It canswitch in menu) Analog signals:0-5V,0-10V,1-5V,4-20mA (customizable) Output type:SSR,Relay,0-10v,4-20mA (0-5Vcustomizable)
TC4H	48*96MM	
TC4M	72*72MM	
TC4L	96*96MM	
TC4W	96*48MM	



Model	Size	Specifications
E5CC	48*48mm	Input type:TC/RTD (K,J,E,T,S,PT100,Cu100,Cu50,It can switch in menu) Analog signals:0-5V,0-10V,1-5V,4-20mA Output type:SSR,Relay Alarm : 1 or 2



FOR COMPREHENSIVE PRODUCT SELECTION DETAILS, KINDLY REACH OUT TO OUR SALES DEPARTMENT.
有关全面的产品选择详细信息，请联系我们的销售部门。



WENZHOU LEICHI TECHNOLOGY CO., LTD.

温州雷驰科技有限公司

TELEPHONE (电话) : +86 150 6829 6819

MAILBOX (邮箱) : ariel@leichitec.com

WEBSITEHTTPS (网站) : <https://leichitec.en.alibaba.com/>

ADDRESS (地址) : JINQIAO WEST ROAD, YUEQING CITY, WENZHOU, ZHEJIANG PROVINCE (浙江省温州乐清市金桥西路)